


A range of economically priced, twin pump variable speed booster sets featuring the MXP stainless steel, multi-stage pump range.

Pumps

MXP horizontal, multi-stage, stainless steel centrifugal pumps with plastic impellers and diffusers.

Motors

Aluminium 2-Pole (2900rpm) induction motors, three phase 230V-50hz, class F insulation, IP54 enclosure, IEC34.

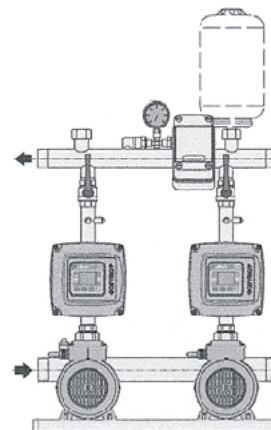



System

Pumps on common galvanised base and fitted with stainless manifolds, brass valves and fittings, 24 ltr pressureWave© accumulator and pressure gauge. Control via 2 x Easymat EMT programmable variable speed controllers 230/1/50 input.


Operating Conditions

Fluid: Clean water	Control: Easymat EMT controller via pressure transducer
Fluid Temp: >35 deg.C	Max pressure: 10 bar
Air Ambient: >40 deg.C	Rated: Continuous service

Performance Data

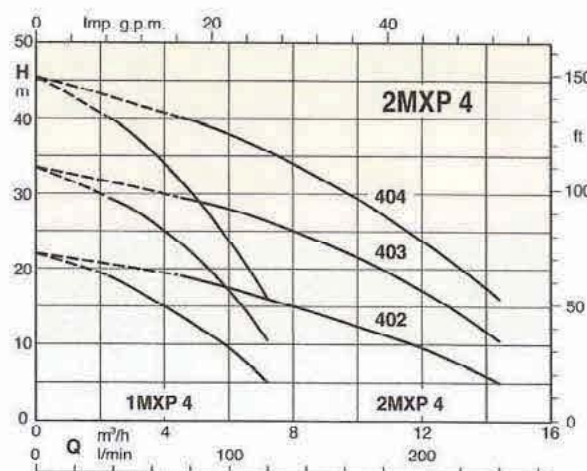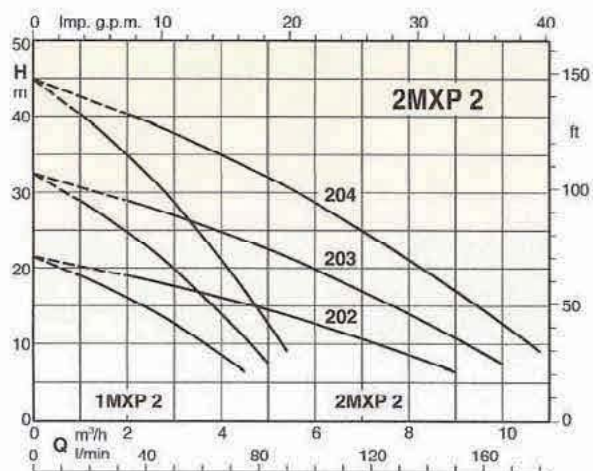

Dimensions

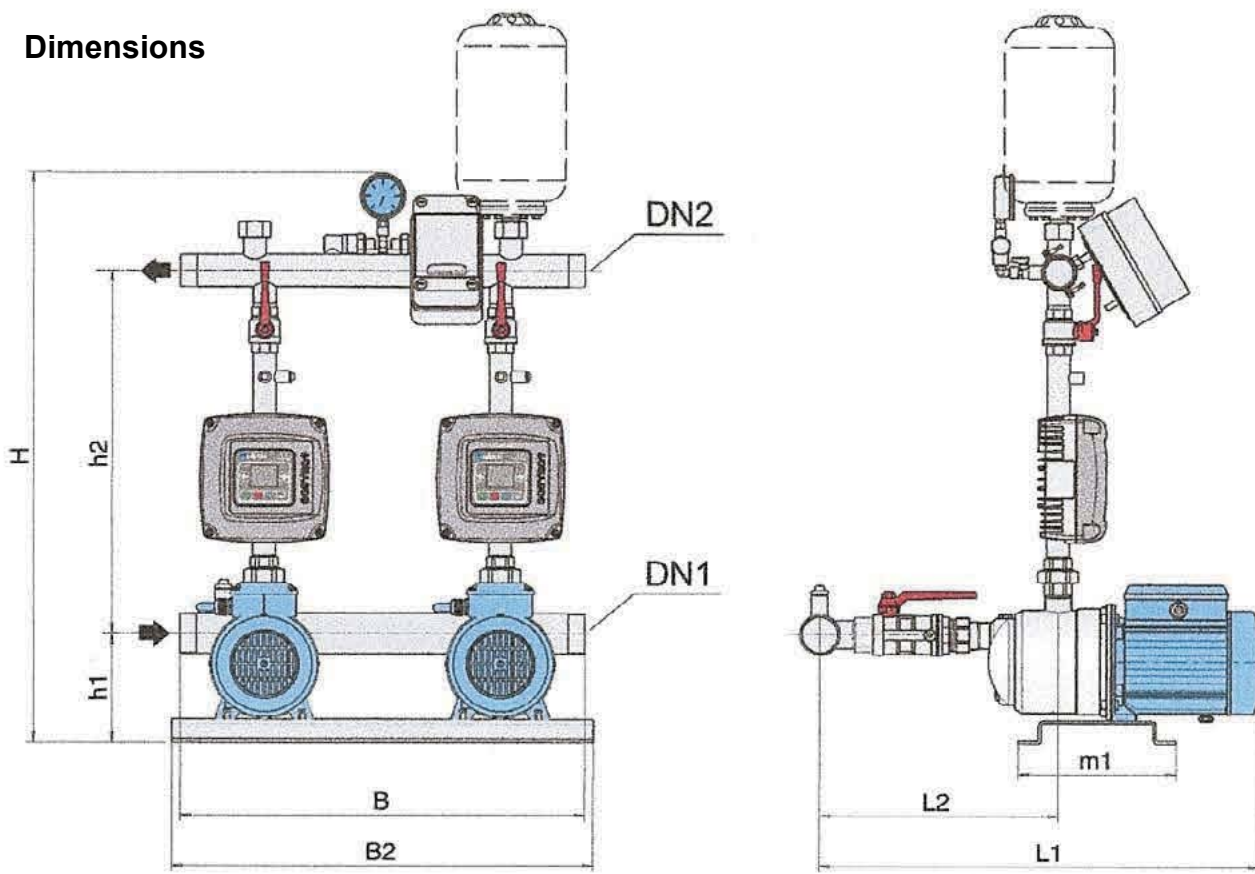

Mains 230/1/50 Motor 230/3/50	P2 DN1		DN2	H*	h1 h2	mm					
	kW	hp				L1	L2	m1	B	B2	
2MXP 202-EMT-24	0.33	0.45					573				
2MXP 203-EMT-24	0.45	0.55	2"	841	150 510	573	326		240 600	625	
2MXP 204/A-EMT-24	0.55	0.75					602				
2MXP 402-EMT-24	0.45	0.55					573				
2MXP 403/A-EMT-24	0.55	0.75	841 2"		150	510	602 326		240 600	625	
2MXP 404/A-EMT-24	0.75	1					602				

*Max height to top of vessel = 1000