

2MXH 2VMXH

A range of two pump fixed speed or variable speed booster sets featuring MXH all stainless steel pumps. Suitable for Duty/Stand-by or Duty/Assist Operation.

Pumps

MXH horizontal, multi-stage, all stainless steel pumps.

Motors

2-pole induction motors, three phase 230/400V, single phase 230V, class F insulation, IP54 enclosure, IEC 34.

System

One piece stainless steel manifolds, brass valves and fittings, stainless steel base plate, 20 ltr stainless steel vessels with butyl membrane (optional steel free standing vessel with stainless flange and butyl membrane). Fully wired with steel armour cable and fully tested.



2VMXH

Operating Conditions

Fluid:	Clean Water	Control:	Fixed Speed ~ Electromat Gold via pressure switches
Fluid Temp:	>90 deg.C		Variable Speed ~ QT series via pressure transducer
Max. Pressure:	10 bar		
Air Ambient:	>40 deg.C		
Rating:	Continuous		

3MXH 3VMXH

A range of three pump fixed speed or variable speed booster sets featuring MXH all stainless steel pumps. Suitable for Duty/Stand-by/Stand-by, Duty/Assist/Stand-by or Duty/Assist/Assist Operation.

Pumps

MXH horizontal, multi-stage, all stainless steel pumps.

Motors








2-pole induction motors, three phase 230/400V, single phase 230V, class F insulation, IP54 enclosure, IEC 34.

System

One piece stainless steel manifolds, brass valves and fittings, mild steel base plate, 20 ltr stainless steel vessels with butyl membrane (optional steel free standing vessel with stainless flange and butyl membrane). Fully wired with steel armour cable and fully tested.




3MXH

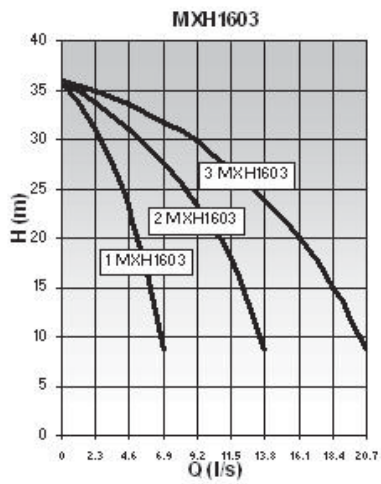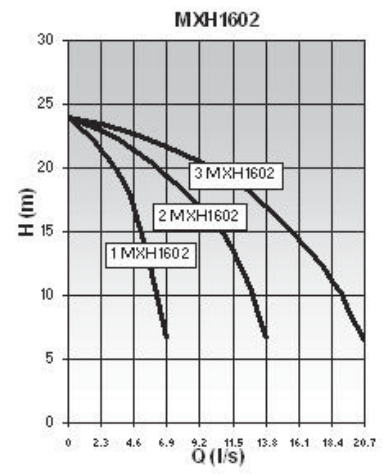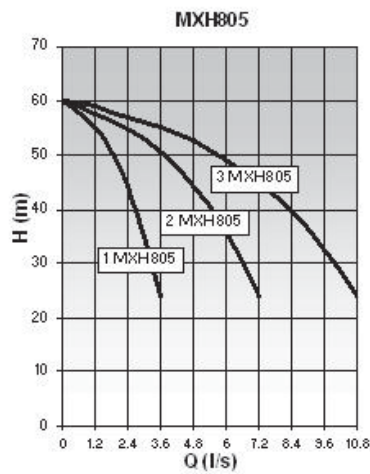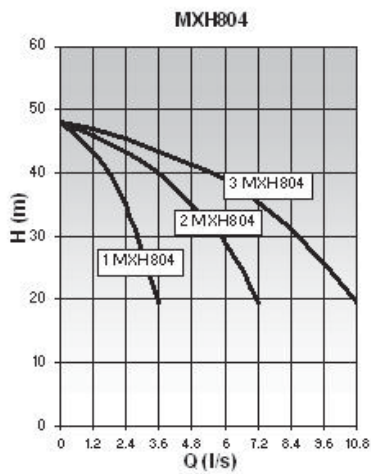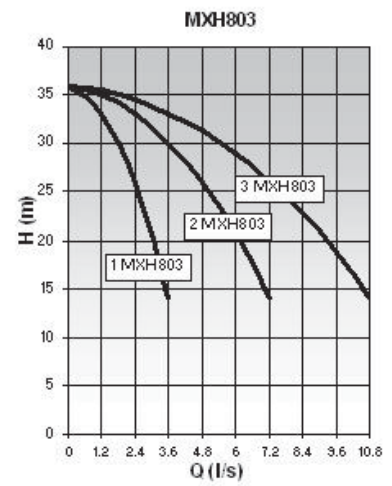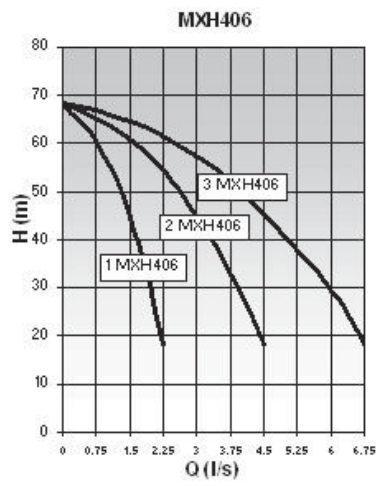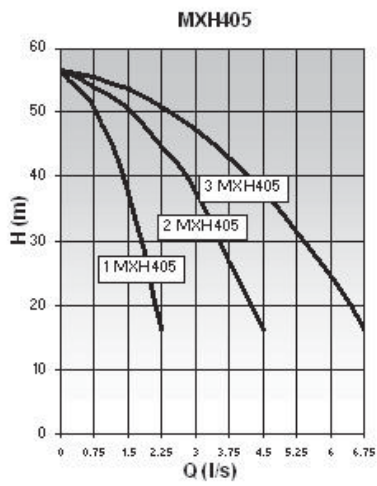

Dimensions 2(V)MXH

17

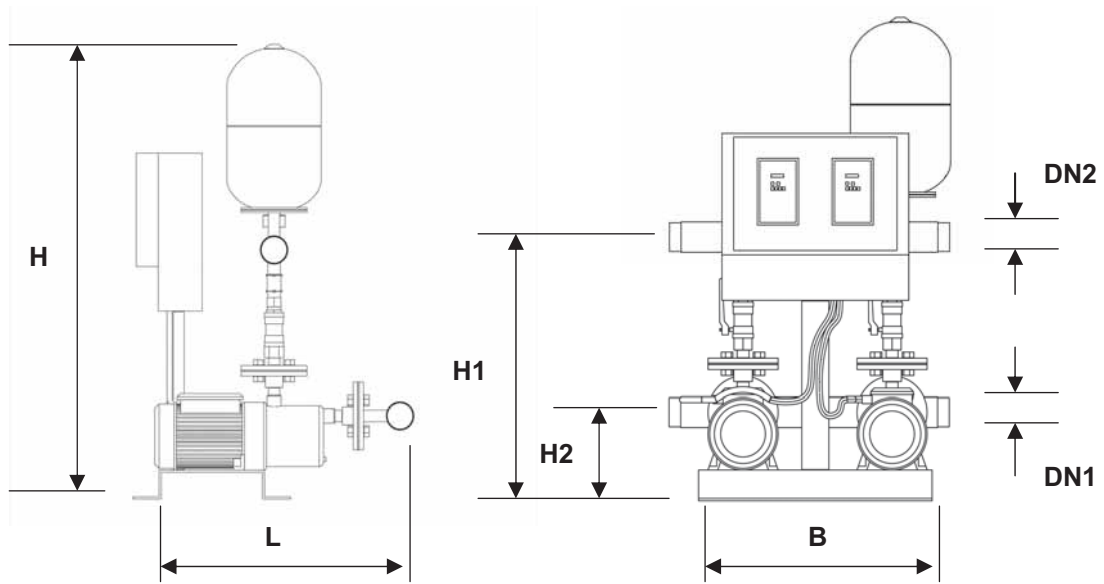

Pump Type	DN1	DN2	H*	L	H1	H2	B
2(V)MXH203E	2"	1-1/2"	1114	551	554	177	500
2(V)MXH204E	2"	1-1/2"	1116	601	556	177	500
2(V)MXH205E	2"	1-1/2"	1116	625	556	177	500
2(V)MXH206	2"	1-1/2"	1116	649	556	177	500
2(V)MXH403E	2-1/2"	2"	1169	617	599	177	500
2(V)MXH404E	2-1/2"	2"	1169	641	599	177	500
2(V)MXH405E	2-1/2"	2"	1169	665	599	177	500
2(V)MXH406	2-1/2"	2"	1172	748	602	177	500
2(V)MXH803	2-1/2"	2-1/2"	1264	710	684	177	500
2(V)MXH804	2-1/2"	2-1/2"	1264	730	684	177	500
2(V)MXH805	2-1/2"	2-1/2"	1264	760	684	177	500
2(V)MXH1602	4"	3"	1264	710	684	167	500
2(V)MXH1603	4"	3"	1264	710	684	167	500

H* Max height where no vessel = 750