
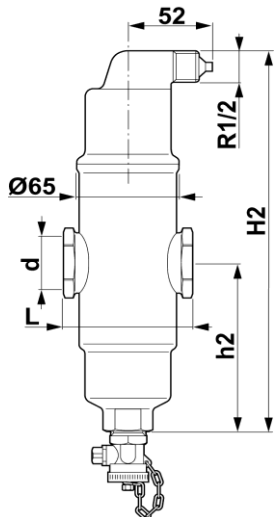


SPIROTECH SPECIFICATION SHEET		SPIROTECH 	
Version 16.1 / BDB			
Product: SpiroCombi 22 mm Compression fitting		Type: AC022	
Customer:			
Project:		Date: 18-3-2016	
Reference:			
Design criteria		Drawing:	
Medium: Water / glycol (max 50%)			
Max. flow velocity: 1 m/s			
Max. flow rate: 1,3 m3/h			
Max. pressure: 10 bar-g			
Max. temperature: 110 °C			
Design standard: EN 13445			
Testing and quality assurance			
Leakage test: no			
Test certificate: no			
Design and manufacturing acc. 97/23/EC: yes			
Material certificates (structural parts): no			
Drawing: no			
Construction materials		Dimensions:	
Body: Brass		d 22 mm	
Deaeration cap: Brass		H2 257 mm	
Valve sealing: Viton		h2 112 mm	
Float: PP		L 106 mm	
Spirotube Tube: S235 JR G2 (St.37)			
Wire: Copper			
Solder: Tin(SnCu3)			
Drain valve: Brass		Volume: 0,35 ltr	
		Dry weight (approx): 1,8 kg	
		Subject to changes	